

ICB-65M2713M5A

SKU: 227051



1/2,8" Network Camera, 2592x1944, Day&Night, DOL-WDR, 2,7-13,5mm, Infrared, IP67

Main Features

1/2.8" Sony STARVIS CMOS sensor	Smart Codec H.265 ROI (Region of interest) HTML5 playback
Resolution max. 2592x1944, 5 Megapixel	Quad Smart Streaming: H.265(+), H.264(+), MJPEG
Motorised varifocal lens 2,7~13.5mm	Micro SD Card, HTML5 replay, Audio, Alarm
DOL-WDR (120dB) by triple scan images at 30/25fps	Power supply PoE IEEE 802.3af
VCA video content analysis, ONVIF event mapping	Integrated connection box including connection board
Browser independent (IE, Edge, Safari, Firefox, Chrome)	Supports ONVIF Profile S and Profile T

Specifications

General:	
Illumination	4x High Power LED 850nm,Infrared
Integrated wall mount	yes
SDK	upon request
Sunshield	yes
Text display	supplied
DORI:	
Observe (62 px/m)	32,5 - 105,4 m
Recognize (125 px/m)	15,3 - 52 m
Identify (250 px/m)	6,4 - 25,7 m
Detect (25px/m)	84 - 262,7 m

ICB-65M2713M5A

Continuation of the specifications

Functions:	
Alarm processing	recording internal storage (SD card),E-Mail,HTTP,FTP,Boost,TCP,UDP,Onvif Event Mapping,alarm out
User interface	Type A (orange / grey)
Motion detector	yes
e-PTZ support	yes
Menu languages	English,German,French,Korean
Mirror function	mirror,flip
Multicast compliant	yes
Password protection	administrator & users
Privacy zone masking	Areas-ON/OFF switchable
Web browser	MS internet Explorer: ActiveX ex 9.0,Safari: MJPEG,Mozilla: MJPEG,Google Chrome: MJPEG,Edge: MJPEG
Notes:	
Special features	Integrated connection box with sabotage alarm contact,Simple wiring, the integrated connection board offers the possibility of network cabling via LSA connection bar or RJ45 socket.Terminal block for connection of alarm contacts and audio.
Camera:	
Imager	Sony STARVIS,Sensor IMX335,CMOS
Automatic electronic shutter (ESC)	1/25 ~ 1/10.000sec.
Flickerless function	yes
Backlight compensation	BLC,HLC
Low speed shutter	1x~10x,yes
Manual electronic shutter (MES)	1/25 ~ 1/10000sec.
Signal-to-noise ratio	50dB
Day&Night mode	Automatic,Day,Night,night-color mode,extern (Sensor)
White balance	ATW-Indoor,ATW-Outdoor,Manual,Fluorescent light,Light bulb,Shade,Clear Sky,Flammes
Wide Dynamic Range (WDR)	D-WDR
Parts supplied:	
Parts supplied	manual,bag of screws
Network:	
Network protocols	TCP/IP,UDP,IPv4,IPv6,HTTP,HTTPS,FTP,UPnP,RT P,RTSP,RTCP,DHCP,ARP,Zeroconf,Bonjour
Interfaces / Inputs/ Outputs:	
External connectors	micro SD card slot,Connection board (LSA, RJ45, audio, I / O alarm & Sabotage contacts)
Video:	
Resolution	2592x1944 (4:3),2592x1520 (16:9),2560x1440 (16:9),1920x1080 (16:9),1600x900 (16:9),1280x720 (16:9),960x540 (16:9),640x360 (16:9),320x180 (16:9)

ICB-65M2713M5A


Continuation of the specifications

Image display	VerticalView 90°/270°,4:3,16:9
Stream types	Multi Streaming
Other	
Manufacturer order number	227051

Optional Accessory

SKU	Name	Description
218218	eneo Site Manager	Management Software for eneo IP products
202641	PM-42A	Pole mount adaptor for eneo Candid, Candid S, Candid M, WB1, AK-5, AK-4

Technical Drawing

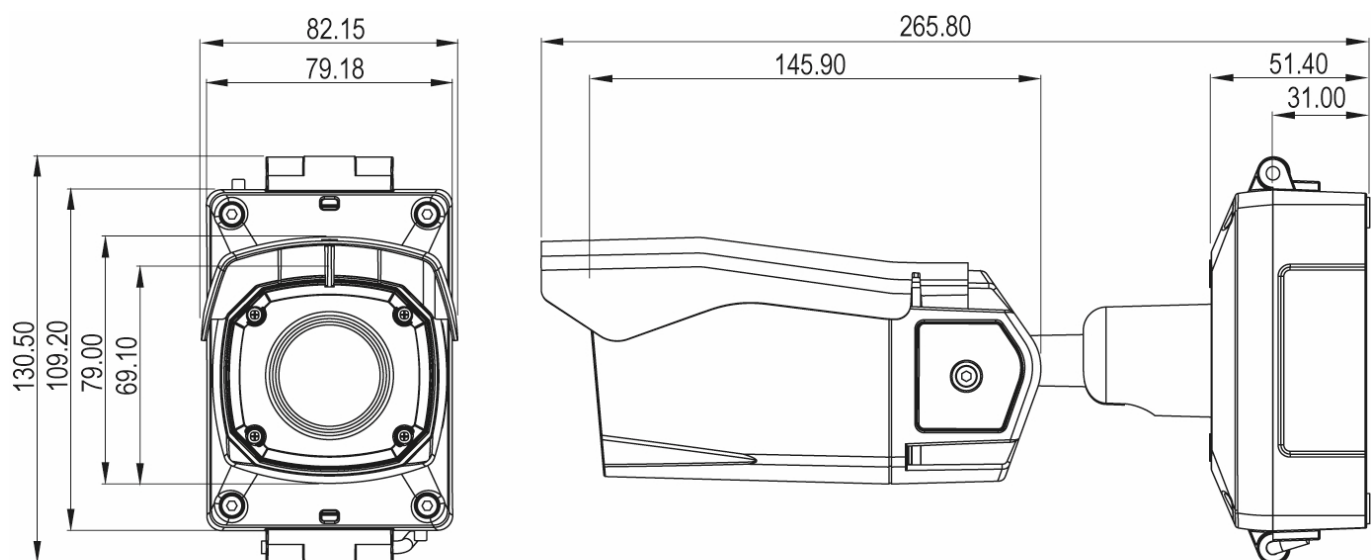

Dimensions / Maße: mm



eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8

63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

Stay informed and subscribe
to the eneo newsletter

