

IPD-75M2713M5A

SKU: 227052



Abb. ähnlich

1/2,8" Network Dome, Fix, 2592x1944, Day&Night, DOL-WDR, 2,7-13,5mm, Infrared, IP67

Main Features

1/2.8" Sony STARVIS CMOS sensor	Smart Codec H.265 ROI (Region of interest)
Resolution max. 2592x1944, 5 Megapixel	Quad Smart Streaming: H.265(+), H.264(+), MJPEG
Motorised varifocal lens 2,7~13.5mm	Micro SD Card, HTML5 replay, Audio, Alarm
DOL-WDR (120dB) by triple scan images at 30/25fps	Power supply PoE, 12VDC or 24VAC
VCA (Video Content Analysis), ONVIF event mapping	For outdoor use IP67, vandal proofed IK10
Browser independent (IE, Edge, Safari, Firefox, Chrome)	Supports ONVIF Profile S and Profile T

Specifications

General:	
Dimensions (HxWxD)	119x140mm
Illumination	2x High Power LEDs 850nm,Infrared
SDK	upon request
Text display	supplied
Series	eneo Callisto, eneo LN-Series
Housing	Indoor, Outdoor
Color (housing)	Pantone Cool Gray 1C
Color (bubble)	clear
Hosuing material	Aluminium
Heater	no

IPD-75M2713M5A

Continuation of the specifications

Blower	yes
Mounting	Ceiling mount, Wall mount
Supply voltage	12VDC, 24VAC, PoE
Power consumption	10,8W
Power over Ethernet	IEEE 802.3af
Vandal proof	yes
Operating temperature	-50°C ~ +50°C
ONVIF	ONVIF Profile S, ONVIF Profile T
Certifications	IK10
Protection rating	IP67
Illumination range	approx. 40m
Weight	1 kg
DORI:	
Observe (62 px/m)	32,5 - 105,4 m
Recognize (125 px/m)	15,3 - 52 m
Identify (250 px/m)	6,4 - 25,7 m
Detect (25px/m)	84 - 262,7 m
Functions:	
Alarm processing	recording internal storage (SD card),E-Mail,HTTP,FTP,Boost,TCP,UDP,Onvif Event Mapping,alarm out
User interface	Type A (orange / grey)
Motion detector	yes
e-PTZ support	yes
Menu languages	English,German,French,Korean
Mirror function	mirror,flip
Multicast compliant	yes
Password protection	administrator & users
Privacy zone masking	Areas-ON/OFF switchable
Vertical tilt range	65 °(25 ~ 90°)
Web browser	MS internet Explorer: ActiveX ex 9.0,Safari: MJPEG,Mozilla: MJPEG,Google Chrome: MJPEG,Edge: MJPEG
Digital Noise Reduction	yes
Rotation range	+/-173°
Audio support	yes
Internal storage	microSDHC card, microSDXC card
Analysis functions	Defog, Field detection, Line detection, Motion detection, Object left,removed
Audio	2 Way Audio
Remote configuration	Browser
Camera:	
Imager	Sony STARVIS,Sensor IMX335,CMOS

IPD-75M2713M5A

Continuation of the specifications

Automatic electronic shutter (ESC)	1/25 ~ 1/10.000sec.
Flickerless function	yes
Backlight compensation	BLC,HLC
Low speed shutter	yes
Manual electronic shutter (MES)	1/25 ~ 1/10000sec.
Signal-to-noise ratio	50dB
Day&Night mode	Automatic,Day,Night,night-color mode,extern (Sensor)
White balance	ATW-Indoor,ATW-Outdoor,Manual,Fluorescent light,Light bulb,Shade,Clear Sky,Flammes
Wide Dynamic Range (WDR)	D-WDR
Resolution Standard	5 Megapixel
System	True Day&Night
Sensor size	1/2.8"
Day&Night switch	ICR
Sensitivity	0,05 Lux at F1,6, 40 IRE
Camera type	Dome
Parts supplied:	
Parts supplied	manual,bag of screws
Network:	
Network protocols	TCP/IP,UDP,IPv4,IPv6,HTTP,HTTPS,FTP,UPnP,RT P,RTSP,RTCP,DHCP,ARP,Zeroconf,Bonjour
Lens:	
Lens Type	Varifocal (motorized)
Focal Length	2,7 - 13,5 mm
Iris Control	DC
Zoom Factor	4x
Digital Zoom	yes
MOD (Mininum Object Distance)	0,5 m
Interfaces / Inputs/ Outputs:	
External connectors	micro SD card slot,Alarm in/output,RJ-45,Combi connector,connection cable approx.15cm
Video outputs	no
Alarm inputs	1
Alarm outputs	1
Ethernet interface	100Base-TX, 10Base-T
Serial interfaces	Ethernet
Video:	
Resolution	2592x1944 (4:3),2592x1520 (16:9),2560x1440 (16:9),1920x1080 (16:9),1600x900 (16:9),1280x720 (16:9),960x540 (16:9),640x360 (16:9),320x180 (16:9)
Image display	VerticalView 90°/270°,4:3,16:9
Stream types	Multi Streaming

IPD-75M2713M5A

Continuation of the specifications


Video compression	H.264, H.264+ (Smart Stream), H.265, H.265+ (Smart Stream), M-JPEG
Image resolution max.	2592x1944
Image Transmission Rate	30 fps
Other	
Horizontal Angle of View	97 - 29°
Vertical Angle of View	54 - 17°
Manufacturer order number	227052

Optional Accessory

SKU	Name	Description
209832	AK-5	Camera Junction Box, for Callisto Dome series, IP66
216923	DOME-S1	Sun Shield for eneo Callisto Dome Series
209880	DOME-WB1+DOME/ Basis1	Wall Bracket & Surface mount base, Callisto Dome line
209831	DOME/BASIS1	Surface mount base , Callisto Dome line
207192	DOME/WEDGE2	Wedge Adapter, Callisto Dome Line
218218	eneo Site Manager	Management Software for eneo IP products
216472	IAD-5SG1008MUA	Gigabit Switch, Unmanaged, 120W, 8x PoE, 1xSFP, 1x RJ45, 10/100/1000 Mbps, Desktop
221334	IAM-4MU1001M0A	EPOC Signalkonverter, BNC auf Zweidraht Übertragung, Zubehör für EPOC Kameras, Transceiver

IPD-75M2713M5A

Technical Drawing

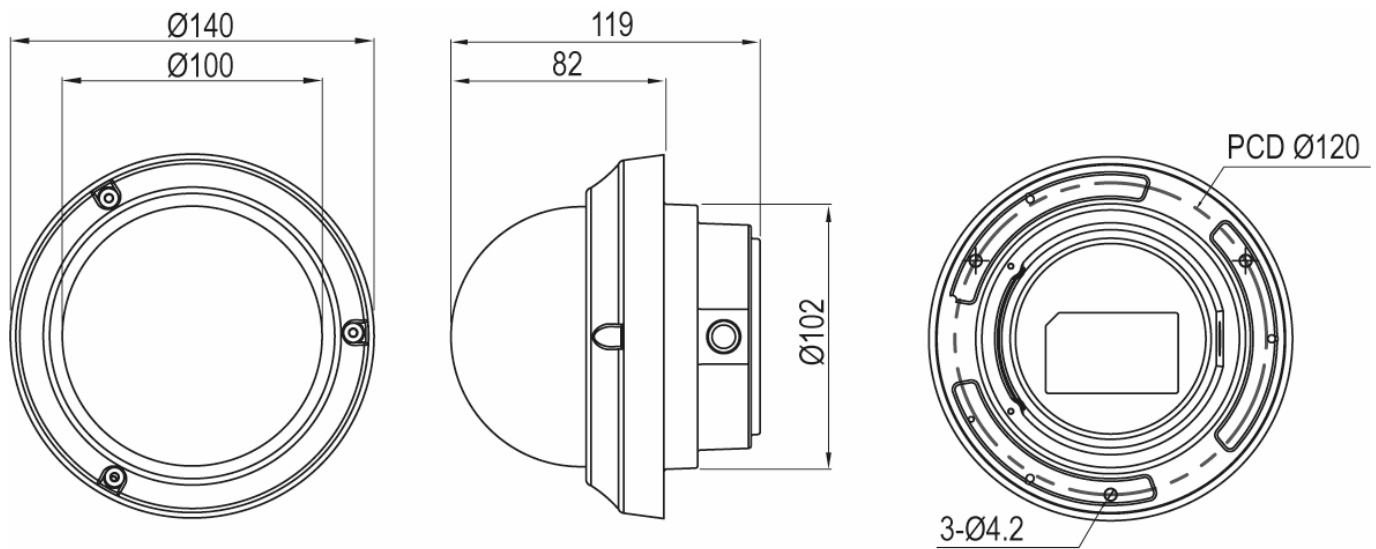

Maße/Dimensions: mm

