

# VM-HD19MR

SKU: 229200



Abb. ähnlich

19" (48cm) LCD, industrial Monitor, 1280x1024, Protection Glass, Rack Mount, 12V, HDMI

## Main Features

|                                                       |                                              |
|-------------------------------------------------------|----------------------------------------------|
| Professional 19" (48 cm) LCD monitor                  | Fast response time 5ms                       |
| Built to run 24x7x365 continuously (Industrial Level) | Different video inputs HDMI, VGA, BNC (CVBS) |
| Including protection glass, Anti-Glare-Display 3H     | Audio In- and Output                         |
| Extended temperature range -30°C ~+85°C               | Built-in speakers                            |
| Maximum resolution 1280x1024 pixels                   | Supply voltage: 12VDC                        |
| LED Back Light                                        | Including 19" mounting frame                 |

## Specifications

| General:              |                                                    |
|-----------------------|----------------------------------------------------|
| Dimensions (HxWxD)    | 355x482x48mm                                       |
| Mount                 | VESA standard 100x100mm,VESA standard 75x75mm      |
| Series                | eneo Monitor                                       |
| Housing color         | black                                              |
| Housing material      | Metal                                              |
| Loudspeaker           | 2                                                  |
| Supply voltage        | 12VDC                                              |
| Power consumption     | 20W                                                |
| Operating temperature | -30°C ~ +85°C, @ Humidity 10%-90% (non-condensing) |


# VM-HD19MR

## Continuation of the specifications


|                               |                                                                  |
|-------------------------------|------------------------------------------------------------------|
| Weight                        | 3kg                                                              |
| Display:                      |                                                                  |
| Pixel fault class             | ISO 13406-2, Class II                                            |
| Pixel format                  | 0,294mm x 0,294mm                                                |
| Video standard                | PAL/NTSC                                                         |
| Resolution Pixels             | 1280x1024                                                        |
| Backlighting                  | LED                                                              |
| Screen size (inch)            | 19"                                                              |
| Screen size (cm)              | 48 cm                                                            |
| Aspect ratio                  | 5:4                                                              |
| Viewing angle vertical        | 178°                                                             |
| Viewing angle horizontal      | 178°                                                             |
| Brightness typical            | 350 cd/m <sup>2</sup>                                            |
| Contrast ratio typical        | 1000:1                                                           |
| Reponse time typical          | 5 ms                                                             |
| Refresh rate                  | 60 Hz                                                            |
| Functions:                    |                                                                  |
| Comb filter                   | 3D Motion Adaptive De-interlace                                  |
| Menu languages                | English                                                          |
| Parts supplied:               |                                                                  |
| Parts supplied                | manual,power cord,PSU 100~240VAC,IR remote controller,HDMI cable |
| Interfaces / Inputs/ Outputs: |                                                                  |
| Audio inputs                  | 1x 3.5mm jack, 1, 1                                              |
| Video inputs                  | HDMI 1.4a,HDCP 2.2,HDCP 1.4                                      |
| Video inputs (type)           | 2x composite (CVBS), HDMI, VGA                                   |
| Video outputs                 | Composite (CVBS)                                                 |
| Serial interfaces             | no                                                               |
| Audio output                  | 1x 3,5mm jack                                                    |
| Video:                        |                                                                  |
| Resolution                    | 1280x1024,1024x768 ,800x600,720x400                              |
| Other                         |                                                                  |
| Display element               | Colour TFT/LCD,Anti-Glare-Display,Hard coating (3H),Haze :3%     |
| Applications                  | 24/7, Industrie                                                  |
| Manufacturer order number     | 229200                                                           |

# VM-HD19MR

## Technical Drawing

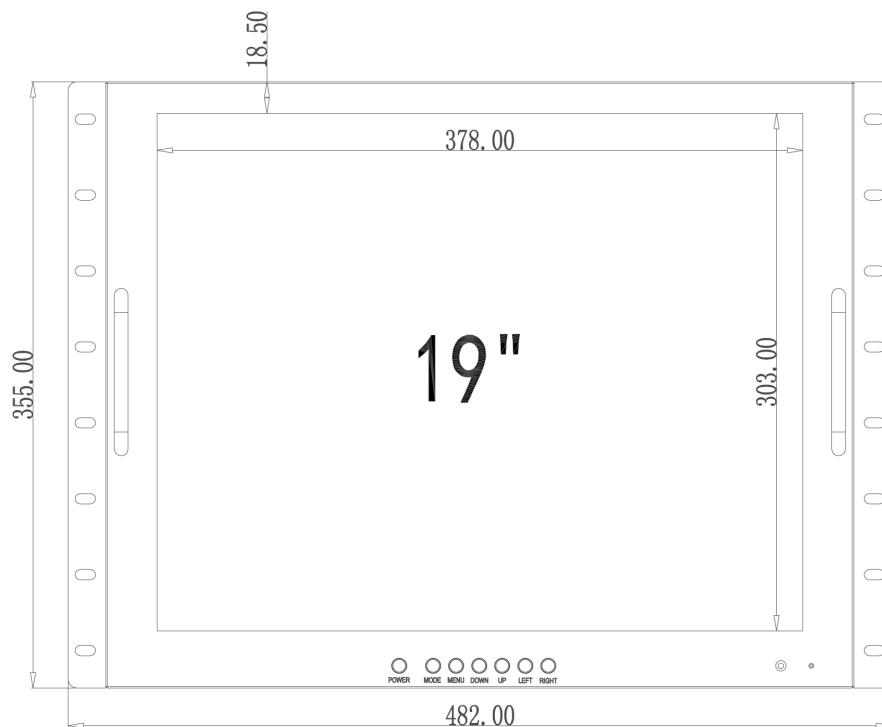

Unit:mm

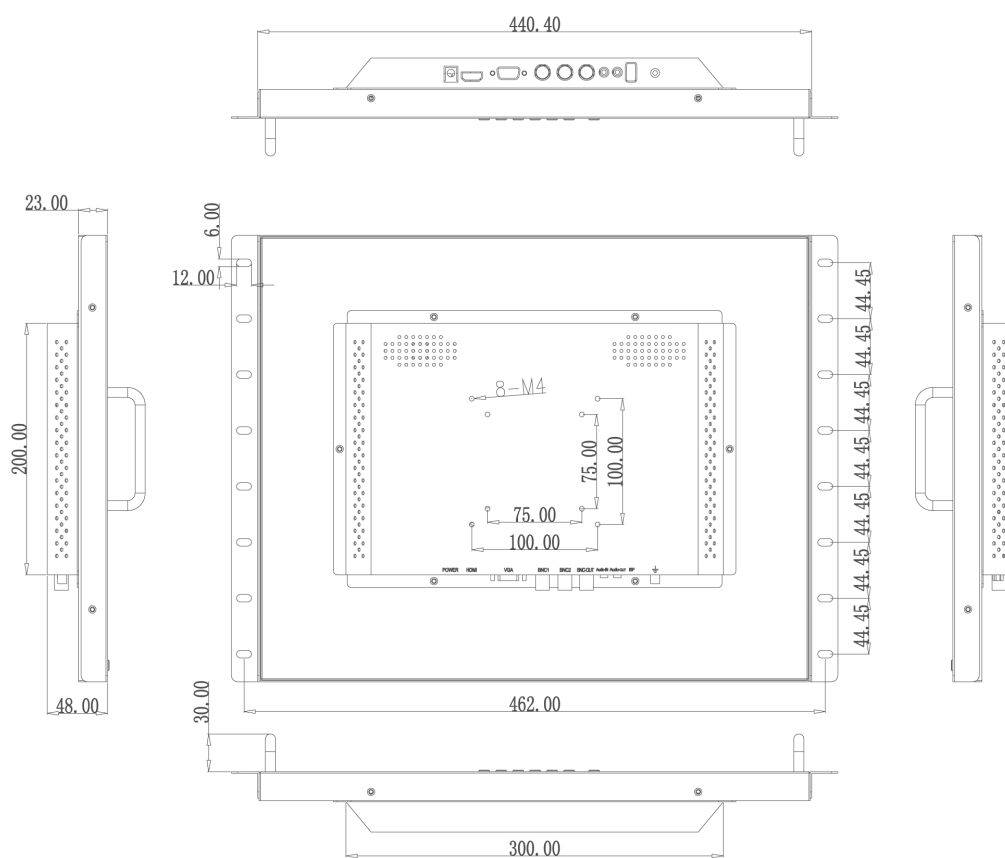

Maße / Dimensions: mm



eneo is a registered trademark of  
VIDEOR E. Hartig GmbH  
Carl-Zeiss-Straße 8

63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300  
Fax: +49 6074 - 888 - 100  
E-Mail: [info@eneo-security.com](mailto:info@eneo-security.com)  
Web: [www.eneo-security.com](http://www.eneo-security.com)

Stay informed and subscribe  
to the eneo newsletter

