

# VM-SD7M

SKU: 229214



Abb. ähnlich

7" (17,7cm) LCD Monitor 800x480, LED, HDMI, VGA, Composite

## Main Features

|                                                                       |                                             |
|-----------------------------------------------------------------------|---------------------------------------------|
| Professional 7" (17,7 cm) LCD monitor                                 | Different video inputs HDMI, VGA, Composite |
| Industrial design built to run 24x7x365 continuously                  | Supply voltage: 12VDC                       |
| Maximum resolution 800x480 pixels                                     | VESA Standard 75x75mm                       |
| LED Back Light                                                        | Metal cabinet including stand               |
| Fast response time 5ms                                                | Metallgehäuse inklusive Standfuß            |
| Perfect presentation through digital 3D filtering and noise reduction |                                             |

## Specifications

| General:              |                                                    |
|-----------------------|----------------------------------------------------|
| Dimensions (HxWxD)    | 132x192x40mm                                       |
| Mount                 | VESA standard 75x75mm                              |
| Series                | eneo Monitor                                       |
| Housing color         | black                                              |
| Hosuing material      | Metal                                              |
| Loudspeaker           | 2                                                  |
| Supply voltage        | 12VDC                                              |
| Power consumption     | 7.5W                                               |
| Operating temperature | -30°C ~ +85°C, @ Humidity 10%-90% (non-condensing) |


# VM-SD7M

## Continuation of the specifications

|                               |                                                                       |
|-------------------------------|-----------------------------------------------------------------------|
| Weight                        | 2.0kg                                                                 |
| Display:                      |                                                                       |
| Pixel fault class             | ISO 13406-2, Class II                                                 |
| Pixel format                  | 0,1926mm × 0,1790mm                                                   |
| Video standard                | PAL/NTSC                                                              |
| Resolution Pixels             | 800x480                                                               |
| Backlighting                  | LED                                                                   |
| Screen size (inch)            | 7"                                                                    |
| Screen size (cm)              | 17.7 cm                                                               |
| Aspect ratio                  | 16:9                                                                  |
| Viewing angle vertical        | 178°                                                                  |
| Viewing angle horizontal      | 178°                                                                  |
| Brightness typical            | 250 cd/m²                                                             |
| Contrast ratio typical        | 500:1                                                                 |
| Reponse time typical          | 5 ms                                                                  |
| Refresh rate                  | 60 Hz                                                                 |
| Functions:                    |                                                                       |
| Comb filter                   | 3D Motion Adaptive De-interlace                                       |
| Menu languages                | English                                                               |
| Parts supplied:               |                                                                       |
| Parts supplied                | manual,power cord,PSU 100~240VAC,feet,IR remote controller,HDMI cable |
| Interfaces / Inputs/ Outputs: |                                                                       |
| Audio inputs                  | 1x 3.5mm jack, 1, 1                                                   |
| Video inputs                  | HDMI 1.4a,HDCP 2.2,HDCP 1.4                                           |
| Video inputs (type)           | 2x composite (CVBS), HDMI, VGA                                        |
| Video outputs                 | Composite (CVBS)                                                      |
| Serial interfaces             | no                                                                    |
| Audio output                  | 1x 3,5mm jack                                                         |
| Video:                        |                                                                       |
| Resolution                    | 800x480,720x400                                                       |
| Other                         |                                                                       |
| Display element               | Colour TFT/LCD,Anti-Glare-Display                                     |
| Manufacturer order number     | 229214                                                                |

# VM-SD7M

## Technical Drawing

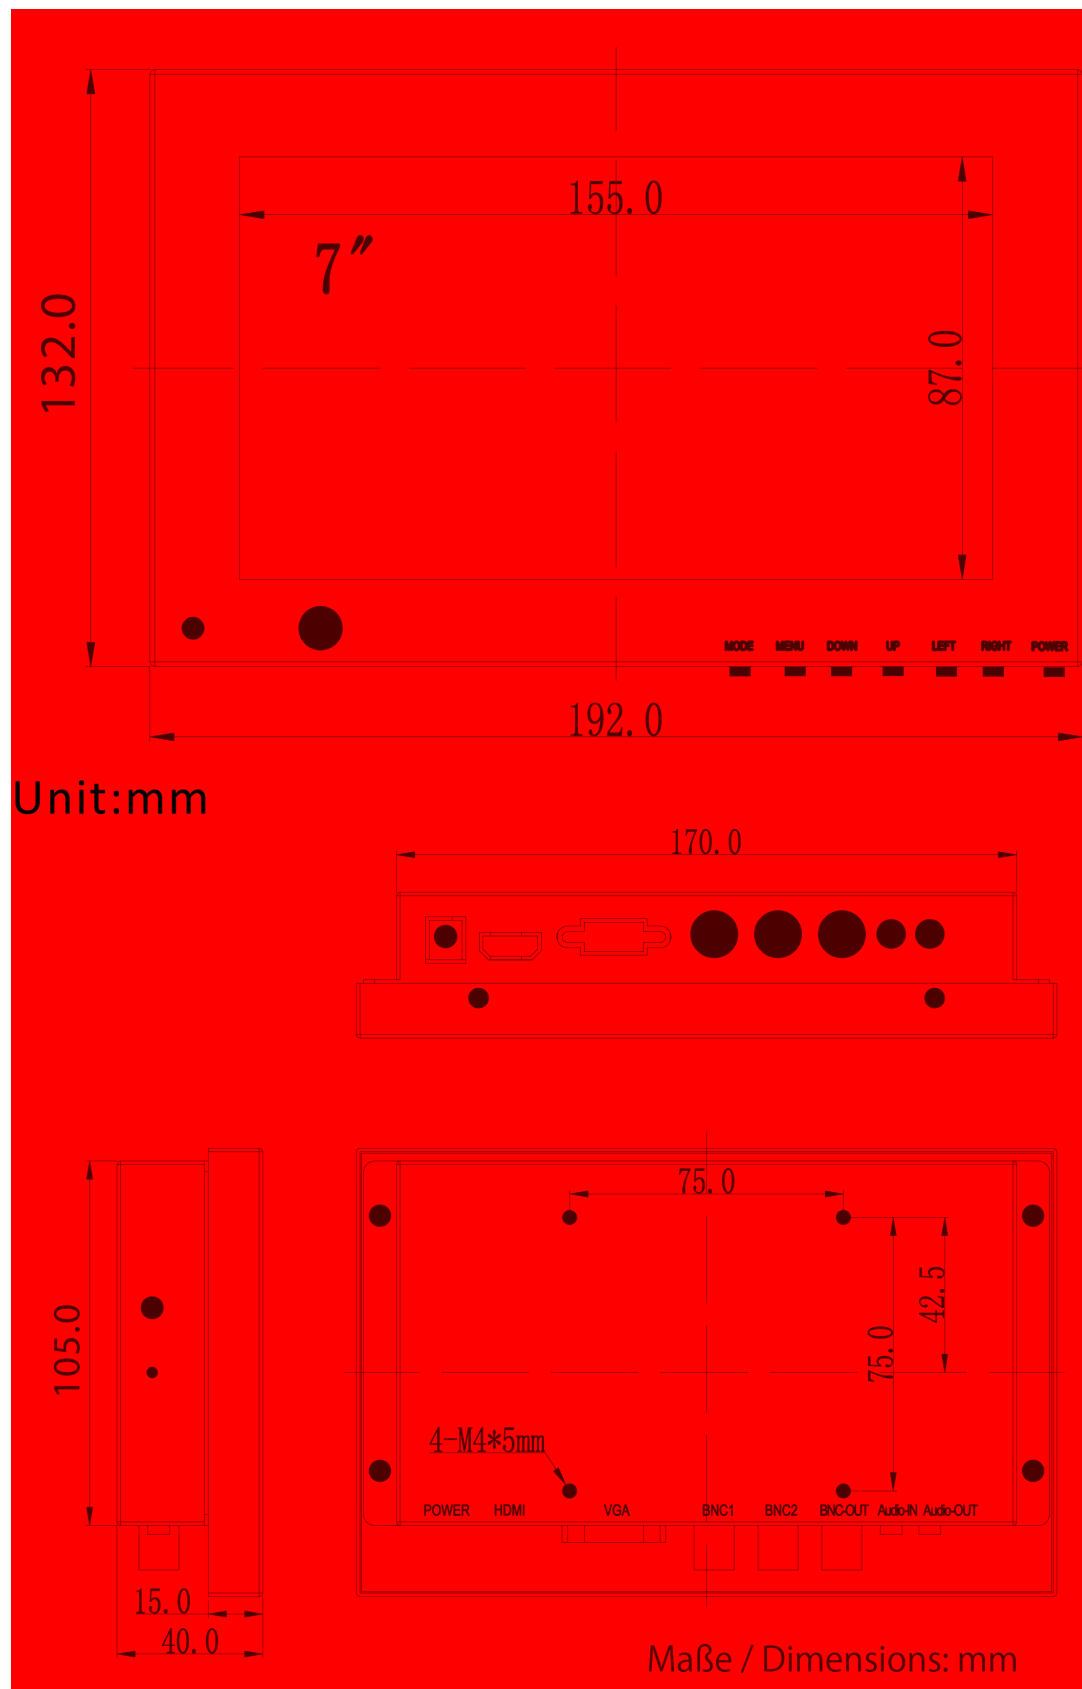

eneo is a registered trademark of  
VIDEOR E. Hartig GmbH  
Carl-Zeiss-Straße 8

63322 Rödermark, Deutschland

Phone:  
Fax:  
E-Mail:  
Web:

+49 6074 - 888 - 300  
+49 6074 - 888 - 100  
info@eneo-security.com  
www.eneo-security.com

Stay informed and subscribe  
to the eneo newsletter

