

ISM-62F0028W0A

SKU: 232562



1/2,8" Network Board Camera 1920x1080, Day/Night, WDR, 2,8mm, H.265, PoE, 12VDC

Main Features

1/2.8" Sony STARVIS CMOS Sensor	Browser independent (IE, Edge, Safari, Firefox, Chrome)
Excellent light sensitivity	Object classification (person, car, bike)
Resolution max. 1920x1080 (Full HD)	Supports ONVIF Profile S
Lens fixed focal length 2.8mm	Operating temperature -20°C ~+50°C
WDR (120dB), BLC, 3DNR	Dimensions 50x50x59mm
Tripple Streaming (H.265, H.264, MJPEG)	Power supply PoE or 12VDC

Specifications

General:	
Dimensions (HxWxD)	see drawing
Illumination	no
Text display	supplied
Camera Type	Board Camera
Housing	without housing
Blower	no
Mounting	Einbaumodul
Supply voltage	12VDC, PoE
Power consumption	3.6W
Power over Ethernet	IEEE 802.3af

ISM-62F0028W0A

Continuation of the specifications

Operating temperature	-20°C ~ +50°C
ONVIF	ONVIF Profile S
Weight	260g
DORI:	
Observe (62 px/m)	17,7 m
Recognize (125 px/m)	8,6 m
Identify (250 px/m)	4,1 m
Detect (25px/m)	44,9 m
Functions:	
Alarm processing	alarm out,FTP,E-Mail
Motion detector	yes
e-PTZ support	yes
Menu languages	English,German
Mirror function	V flip,H-flip
Multicast compliant	yes
Password protection	administrator & users
Privacy zone masking	Areas-ON/OFF switchable
Web browser	MS Internet Explorer 11,Safari: MJPEG,Mozilla: MJPEG,Google Chrome: Java,Edge: MJPEG
Digital Noise Reduction	yes
Audio support	yes
Internal storage	no
Analysis functions	Human&Vehicle Detection (PD&VD), Motion detection
Audio	2 Way Audio
Remote configuration	Browser, Remote software
Notes:	
Remarks	NDAA compliance under Section 889,To guarantee you an optimum user experience, we recommend that you only use components of the same brand in a system. If several brands are used in combination, eneo cannot guarantee functionality. If combined use is necessary, we offer a compatibility check for a fee (for more information, see article number #229235 at VIDEOR).
Camera:	
Imager	Sony STARVIS,Sensor IMX327,CMOS
Automatic electronic shutter (ESC)	1/4 ~ 1/10.000sec..
Flickerless function	yes
Backlight compensation	BLC
Low speed shutter	no
Manual electronic shutter (MES)	1/4 ~ 1/10.000sec.
Signal-to-noise ratio	50dB
Day&Night mode	Automatic,Day,Night,Time

ISM-62F0028W0A

Continuation of the specifications

White balance	ATW,Manual
Wide Dynamic Range (WDR)	WDR 120dB
Resolution Standard	HD 1080p
System	True Day&Night
Sensor size	1/2.8"
Day&Night switch	ICR
Sensitivity	0,002 Lux at F1,6
Camera type	Platine
Parts supplied:	
Parts supplied	manual,Connection cable set
Network:	
Network protocols	IPv4,IPv6,IGMP,ICMP,ARP,TCP,UDP,DHCP,RTP,R TSP,RTCP,DNS,DDNS,NTP,SMTP,FTP,UPnP,HTTP ,HTTPS,SSL
Lens:	
Lens Type	fixed focal length
Focal Length	2,8 mm
Iris Control	DC
MOD (Mininum Object Distance)	0,5 m
Interfaces / Inputs/ Outputs:	
External connectors	12VDC power input,Alarm in/output,Audio in/output,RJ-45
Video outputs	no
Alarm inputs	1
Alarm outputs	1
Ethernet interface	100Base-TX, 10Base-T
Serial interfaces	Ethernet
Video:	
Resolution	1920x1080 (16:9),1280x1024 (5:4),1024x768 (4:3),1280x720 (16:9),704x576 (4:3),704x480 (4:3),640x480 (4:3),640x360 (16:9),352x288 (4:3),352:240 (4:3)
Image display	VerticalView 90°/270°
Stream types	Multi Streaming
Video compression	H.264, H.265
Image resolution max.	1920x1080
Image Transmission Rate	30 fps
Other	
Horizontal Angle of View	113°
Vertical Angle of View	61°
Manufacturer order number	232562

Optional Accessory


SKU	Name	Description
-----	------	-------------

ISM-62F0028W0A

Continuation of accessory

218218	eneo Site Manager	Management Software for eneo IP products
--------	-------------------	--

Technical Drawing

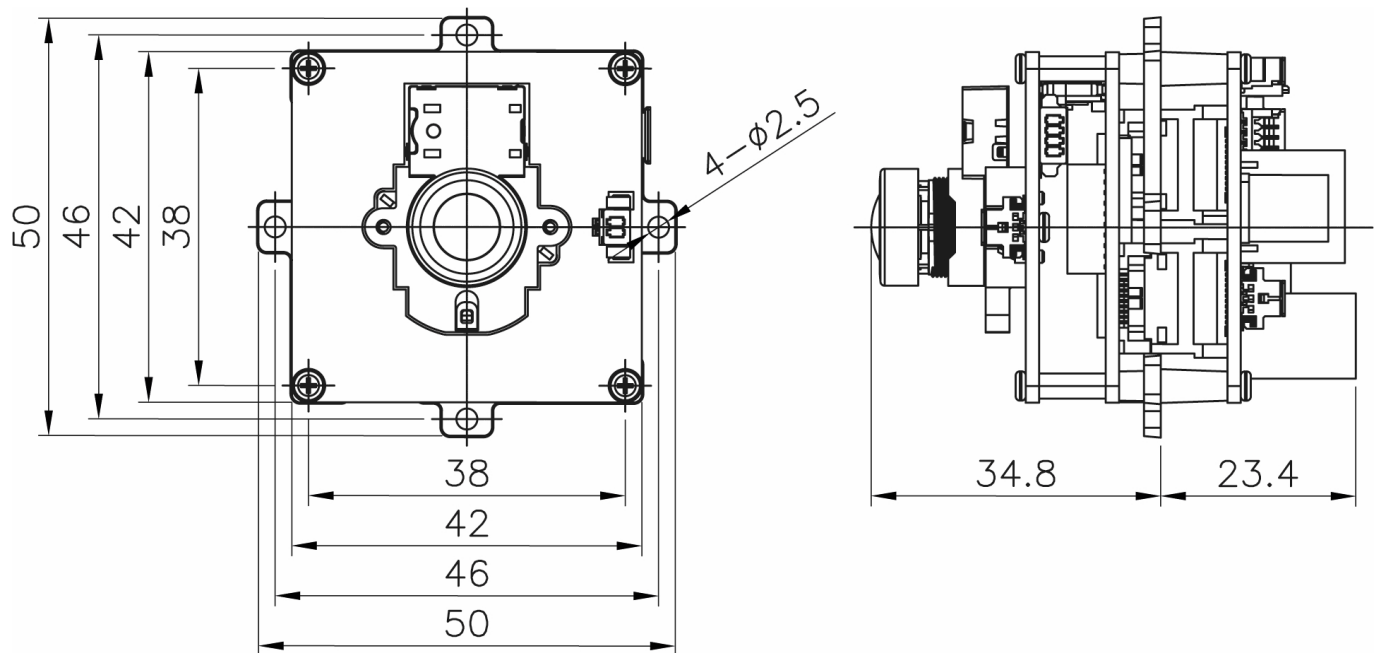

Maße / Dimensions: mm



eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8

63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

Stay informed and subscribe
to the eneo newsletter

