

VM-HD19MPA

SKU: 233036



19" (48cm) LCD, Industrial Monitor, 1280x1024, HDMI, VGA, Composite, Protection Glass

Main Features

Professional 19" (48 cm) LCD monitor	Fast response time 5ms
Built to run 24x7x365 continuously (Industrial Level)	Different video inputs HDMI, VGA, BNC (CVBS)
Including protection glass, Anti-Glare-Display 3H	Audio In- and Output
Maximum resolution 1280x1024 pixels	Built-in speakers
LED Back Light	Metal cabinet including wall mount

Specifications

General:	
Dimensions (HxWxD)	340,6x401,28x49mm
Mount	VESA standard 100x100mm
Series	eneo Monitor
Housing color	black
Housing material	Metal
Loudspeaker	2
Power consumption	25W
Operating temperature	10°C ~ +40°C
Weight	4,1kg
Display:	
Pixel fault class	ISO 13406-2, Class II

VM-HD19MPA

Continuation of the specifications


Video standard	PAL/NTSC
Resolution Pixels	1280x1024
Backlighting	LED
Screen size (inch)	19"
Screen size (cm)	48 cm
Aspect ratio	5:4
Viewing angle vertical	178°
Viewing angle horizontal	178°
Brightness typical	250 cd/m²
Contrast ratio typical	1000:1
Reponse time typical	14 ms
Refresh rate	60 Hz
Functions:	
Comb filter	3D comb filter with de-interlace
Menu languages	English,German,Italian,French,Chinese
Parts supplied:	
Parts supplied	manual,power cord,wall bracket,HDMI cable
Interfaces / Inputs/ Outputs:	
Audio inputs	1x 3.5mm jack,1, 1
Video inputs	HDMI 1.4a,HDCP 1.4
Video inputs (type)	composite (CVBS), HDMI, VGA
Video outputs	Composite (CVBS)
Serial interfaces	no
Video:	
Resolution	1280x1024,1024x768 ,800x600,640x480
Other	
Display element	Colour TFT/LCD,Anti-Glare-Display,Haze: 89%,Protection Glass,Not anit-glare type,Hard coating (6.5H)
Manufacturer order number	233036

Optional Accessory

SKU	Name	Description
224229	VM-LCDWMB2	Wall bracket for LCD monitors horizontal adjustable, support up to max. 8 kg
228560	VM-TSHA	Monitor stand high adjustable up to 130mm, for LCD-Monitors, 15-27 Inch, maximum 10Kg

VM-HD19MPA

Technical Drawing

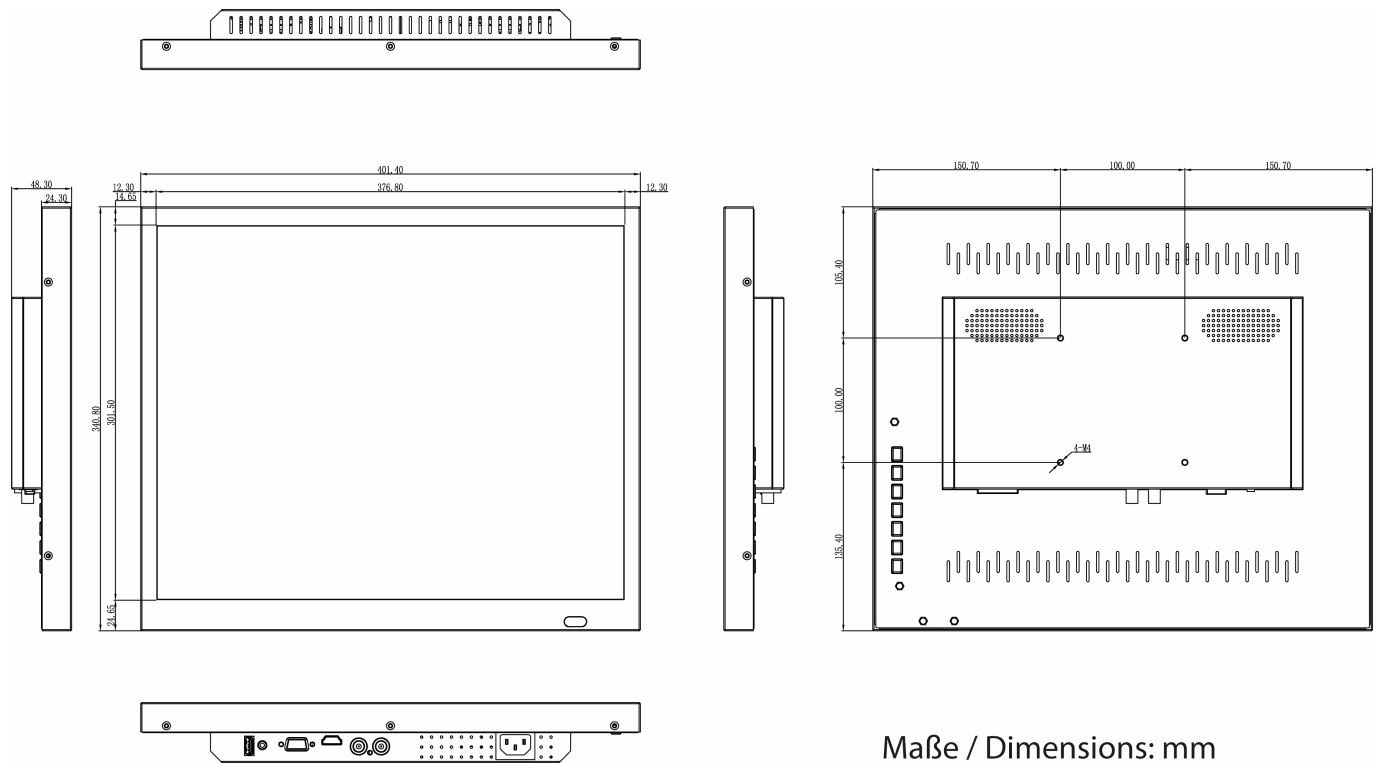

eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8

63322 Rödermark, Deutschland

Phone:
Fax:
E-Mail:
Web:

+49 6074 - 888 - 300
+49 6074 - 888 - 100
info@eneo-security.com
www.eneo-security.com

Stay informed and subscribe
to the eneo newsletter

