

MPC-52A0010M0A

SKU: 233051



1/3" HD Camera, 1920x1080, 10x AF Zoom
5,1-51mm, T-WDR, HD-SDI, EX-SDI, TVI, Composite

Main Features

1/3" 2,0 Megapixel Panasonic CMOS-Sensor	Digital Image Stabilization
Resolution max. 1920x1080, 1080p@60/50fps	Privacy Masking, Defog
Optical 10x Auto Focus Zoom, 5,1~51mm	Slow Speed Shutter
Multisignal Output HD-SDI, EX-SDI, TVI, Composite	Compact Housing
Real time True WDR	Power Supply 12VDC
Digital Noise Reduction(2D+3D)	

Specifications

General:	
Dimensions (HxWxD)	62x59x100mm
Illumination	no
Integrated wall mount	no
Text display	supplied
Housing	Indoor
Color (housing)	black, silbermetallic
Hosuing material	Aluminium
Supply voltage	12VDC
Power consumption	3W
Vandal proof	no

MPC-52A0010M0A

Continuation of the specifications

Operating temperature	-10°C ~ +50°C
Weight	420g
DORI:	
Observe (62 px/m)	33,2 - 326 m
Recognize (125 px/m)	16,4 - 164 m
Identify (250 px/m)	8,1 - 82 m
Detect (25px/m)	83,2 - 816 m
Functions:	
Motion detector	yes
OSD function control	OSD camera setup
Menu languages	English,Japanese,Chinese
Mirror function	V flip,H-flip,H/V flip
Privacy zone masking	Areas-ON/OFF switchable
Digital Noise Reduction	yes
Analysis functions	Motion detection
Camera:	
Imager	Panasonic MN34422,CMOS
Automatic electronic shutter (ESC)	1/25 ~ 1/30.000sec.
Flickerless function	yes
Backlight compensation	BLC,HLC
Low speed shutter	yes
Manual electronic shutter (MES)	1/25 ~ 1/30.000sec
Signal-to-noise ratio	50dB
Day&Night mode	Automatic,Day,Night,extern (Sensor)
White balance	AUTO,One push,Manual,Indoor,Outdoor
Wide Dynamic Range (WDR)	Real Time WDR 25/30fps,WDR 120dB
System	True Day&Night
Sensor size	1/3"
Day&Night switch	ICR
Sensitivity	0,5 Lux at F1,6, 50 IRE
Camera type	Zoom Camera
Parts supplied:	
Parts supplied	manual
Lens:	
Lens Type	auto focus zoom
Focal Length	5,1 - 51 mm
Iris Control	DC
Zoom Factor	10x
Digital Zoom	yes
MOD (Mininum Object Distance)	0,1 m
Aperture range (F)	F1.6~F1.8
Interfaces / Inputs/ Outputs:	

MPC-52A0010M0A

Continuation of the specifications


External connectors	1x SDI Signal (BNC), 1x HD/SD Analog Signal (BNC), 12VDC power input, RS-485, external day&night switching, Alarm output
Serial interfaces protocols	Pelco P, Pelco D, UTC (HD-Signal Format)
Video outputs	Composite (CVBS), EX-SDI, HD-SDI, HD-TVI
Alarm outputs	1
Serial interfaces	Coaxitron (HD Protocol), RS-485
Video:	
Synchronization	internal
Horizontal resolution	700 TVL
Signal format	Composite (FBAS), EX-SDI (270 Mbps), HD-SDI (1.485 Gbps), HD-TVI @ 2MP
Frame rate	25/30fps @ 1280x720p, 25/30fps @ 1920x1080p, 50/60fps @ 1280x720p, 50/60fps @ 1920x1080p
Other	
Video standard	PAL/NTSC
Resolution Pixels	1280x720, 1920x1080
Horizontal Angle of View	54 - 4,9°
Vertical Angle of View	31 - 4,0°
Manufacturer order number	233051

Optional Accessory

SKU	Name	Description
225085	MAM-5DC1004M0A	Distributor, 1x BNC Input HD-TVI, CVI, AHD, CVBS, 4x BNC Output
220299	MAM-5MM1001M0A	Converter, HD-CVI, HD-TVI, AHD, Composite to HDMI, VGA, Composite, Indoor
218653	PS12DC-11	Plug-in Power Supply Unit, 100-240VAC/12VDC (1,0A), regulated, with DC Plug
212984	TVA-1201TRA	UTP Transmitter+Receiver, UTP, BNC, 250m, Indoor, HD TVI CVI, AHD, CVBS, Active, 12V
212985	TVA-1201TRP	UTP Transmitter+Receiver, UTP, BNC, 150m, Indoor, HD TVI CVI, AHD, CVBS, Passive
219504	WD-30	Wall Mount Bracket with Ball Joint, 1/4" Camera Fixing Screw, Pantone Cool Grey 1C

MPC-52A0010M0A

Technical Drawing

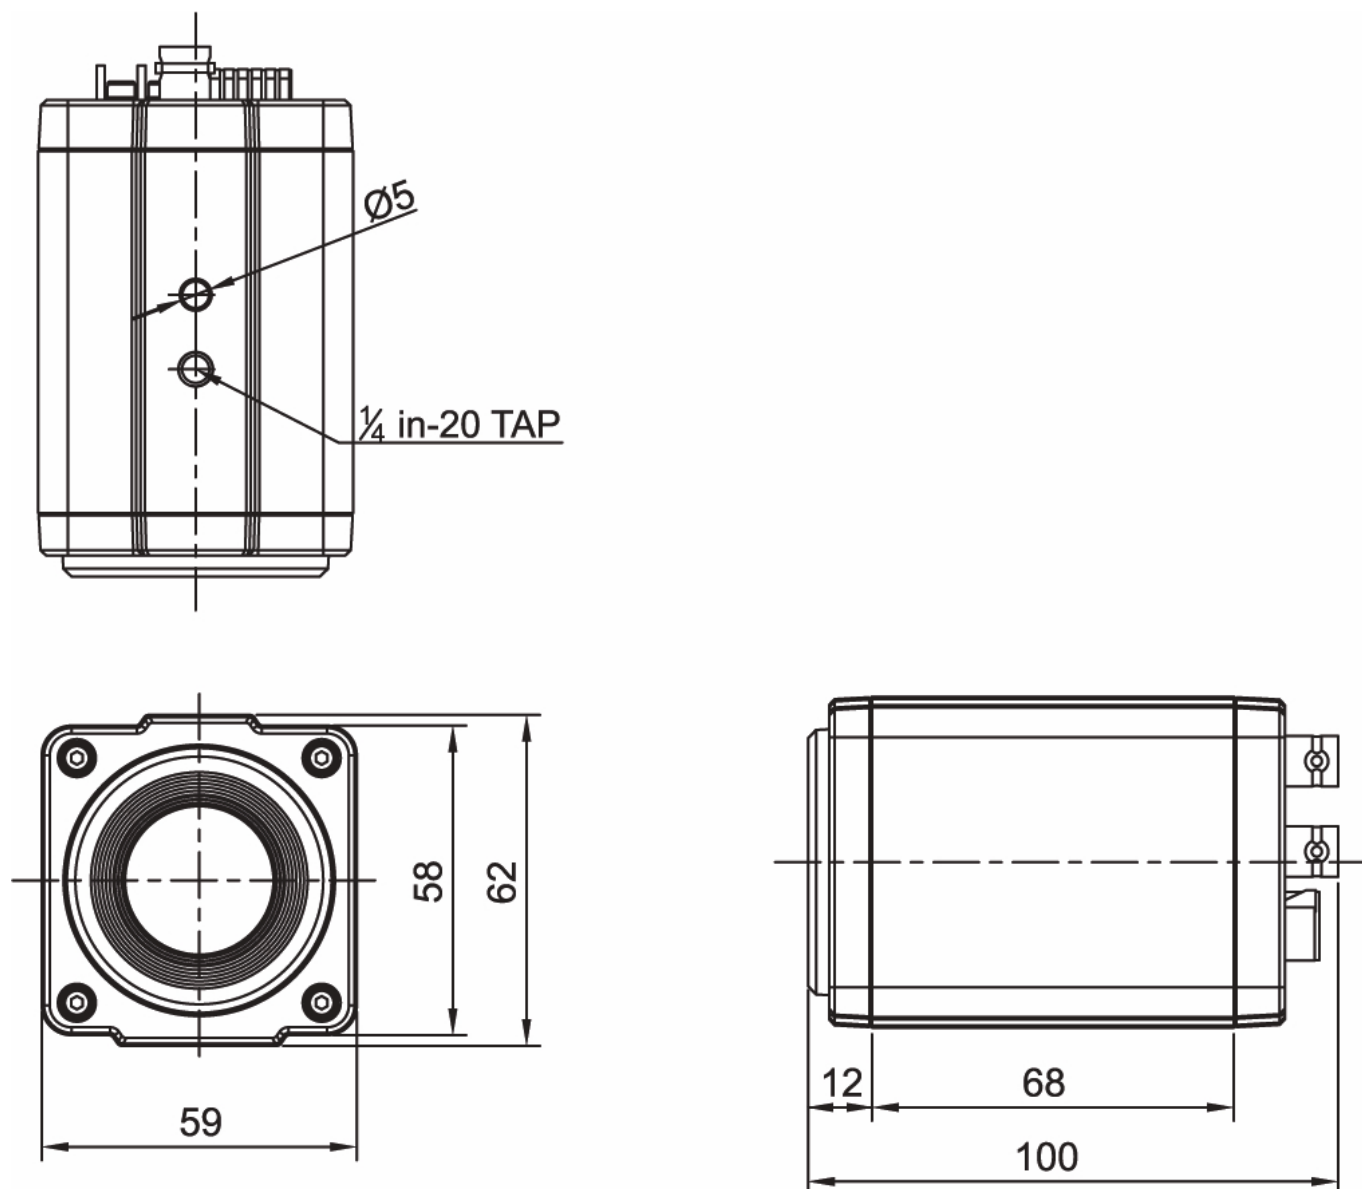

Maße / Dimensions: mm



eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8

63322 Rödermark, Deutschland

Phone:
Fax:
E-Mail:
Web:

+49 6074 - 888 - 300
+49 6074 - 888 - 100
info@eneo-security.com
www.eneo-security.com

Stay informed and subscribe
to the eneo newsletter

