

INP-75A0033MIA

SKU: 234751



Netzwerk Dome, PTZ, 33x 2952x1944, Tag/Nacht, WDR, AI Alarm, Audio, 24/12V, PoE,IP66

Main Features

1/2.7" CMOS sensor, maximum resolution 5 MP/30fps	Supports ONVIF Profile S and Profile T
AI analysis functions including object classification	Local storage via Micro SD card
WDR 120dB, 3D-DNR Noise Reduction	Audio input and output
Motorized autofocus zoom lens 33x 4.3-142mm	Power supply 12VDC, 24VAC or PoE IEEE 802.3at
Smart Codec H.265/H.264, multi-streaming	IR LED illumination, IP66
Browser independent (IE, Edge, Safari, Firefox, Chrome)	Wall bracket included

Specifications

General:	
Dimensions (HxWxD)	206,4×351,8mm
Illumination	10x LED 850nm,Infrared
Integrated wall mount	no
Text display	ON/OFF switchable
Series	eneo IN-Series
Camera Type	Face recognition, People Count, Retail Intelligence
Housing	Outdoor
Color (housing)	black, Pantone P 179-1, RAL9003
Hosuing material	Aluminium
Heater	no

INP-75A0033MIA

Continuation of the specifications

Blower	no
Mounting	Wall mount
Supply voltage	12VDC, PoE+
Power consumption	25,5W
Power over Ethernet	IEEE 802.3at
Vandal proof	no
Operating temperature	-30°C ~ +60°C, @ Humidity 90% or less (non-condensing)
ONVIF	ONVIF Profile G, ONVIF Profile S, ONVIF Profile T
Protection rating	IP66
Illumination range	approx. 150m
Weight	3.7kg
DORI:	
Observe (62 px/m)	35,6 - 1107,3 m
Recognize (125 px/m)	17 - 548,3 m
Identify (250 px/m)	7,5 - 273,3 m
Detect (25px/m)	90,2 - 2728,4 m
Functions:	
Alarm processing	recording internal storage (SD card),E-Mail,FTP,Cloud Upload
Motion detector	yes
Menu languages	English,German,French,Italian,Portugese,Spanish,Turkish,Russian,Japanese
Mirror function	V flip,H-flip,H/V flip
Multicast compliant	yes
Password protection	administrator & users
Presets	250 presets
Privacy zone masking	Areas-ON/OFF switchable
Tours	up to 1 user programmable guard tour
Web browser	MS Internet Explorer 10/11,Safari ,Firefox ,Google Chrome ,Edge
Digital Noise Reduction	3D-DNR, yes
Rotation range	360°
Speed (manual)	200°/Sek.
Speed (preset)	200°/Sek.
Pattern	4 Abfahrten
Audio support	yes
Internal storage	256GB, microSDHC card, microSDXC card
Analysis functions	Cross Counting (CC), Face Detection (FD), Face Recognition (FR), Heat Map (HM), Human&Vehicle Detection (PD&VD), Line Crossing Detection (LCD), Perimeter Intrusion Detection (PID), Stationary Object Detection (SOD), Tampering Detection (TD)
Audio	1/1 Line input and output, 2 Way Audio

INP-75A0033MIA

Continuation of the specifications

Remote configuration	Browser
Camera:	
Imager	OmniVision, OS05A20, CMOS, CMOS
Automatic electronic shutter (ESC)	1/5 ~ 1/20.000sec.
Flickerless function	yes
Backlight compensation	BLC, HLC
Low speed shutter	yes
Manual electronic shutter (MES)	1/5 ~ 1/20.000sec.
Day&Night mode	Automatic, Day, Night, Image, Time
White balance	Automatic, Manual
Wide Dynamic Range (WDR)	WDR 120dB, WDR 120dB
Resolution Standard	5 Megapixel
System	True Day&Night
Sensor size	1/2.7"
Day&Night switch	ICR
Sensitivity	0,003 Lux at F1,6
Camera type	PTZ
Parts supplied:	
Parts supplied	manual, wall bracket, bag of screws
Network:	
Network protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, SMTP, NTP, UPnP, SNMP, HTTPS, FTP
Lens:	
Lens Type	auto focus zoom
Focal Length	4,3 - 142 mm
Iris Control	DC
Zoom Factor	33x
Interfaces / Inputs/ Outputs:	
External connectors	RJ-45, Audio input/output, 12VDC input (DC plug), connection cable approx. 45cm, micro SD card slot 256 GB
Alarm inputs	no
Alarm outputs	no
Ethernet interface	100Base-TX, 10Base-T
Serial interfaces	Ethernet
Video:	
Resolution	2592x1944 (4:3), 2592x1520 (16:9), 2304x1296 (16:9), 1920x1080 (16:9), 1280x960 (4:3), 640x480 (4:3), 320x240 (4:3)
Image display	16:9, 4:3
Stream types	Triple-Stream (Main/Sub/Mobile)
Video compression	H.264, H.264+ (Smart Stream), H.265, H.265+ (Smart Stream), M-JPEG

INP-75A0033MIA

Continuation of the specifications


Image resolution max.	2592x1944
Image Transmission Rate	30 fps
Other	
Remarks	The face recognition functions are only available with an inserted SD card or in conjunction with a recorder of the eneo IN series.,To guarantee you an optimum user experience, we recommend that you only use components of the same brand in a system. If several brands are used in combination, eneo cannot guarantee functionality. If combined use is necessary, we offer a compatibility check for a fee (for more information, see article number #229235 at
Low Speed Shutter	yes
Backlight Compensation	BLC, HLC
Motion Detector	yes
Horizontal Angle of View	55 - 2,3°
Vertical Angle of View	41,6 - 1,7°
Illumination	Infrared
Manufacturer order number	234751

Optional Accessory

SKU	Name	Description
235562	CM-22	Corner mounting adapter for wall bracket WB-24 and PTZ dome camera INP-75A0033MIA
236198	eneo INsight Installation Tool	Supports adjustments for cameras with AI features for IN-series
234990	eneo INsight mobile	Mobile App for recorder IN- and MN-series
218218	eneo Site Manager	Management Software for eneo IP products
235257	PM-21	Pole mounting adapter for camera connection box AK-20 and AK-21

INP-75A0033MIA

Technical Drawing

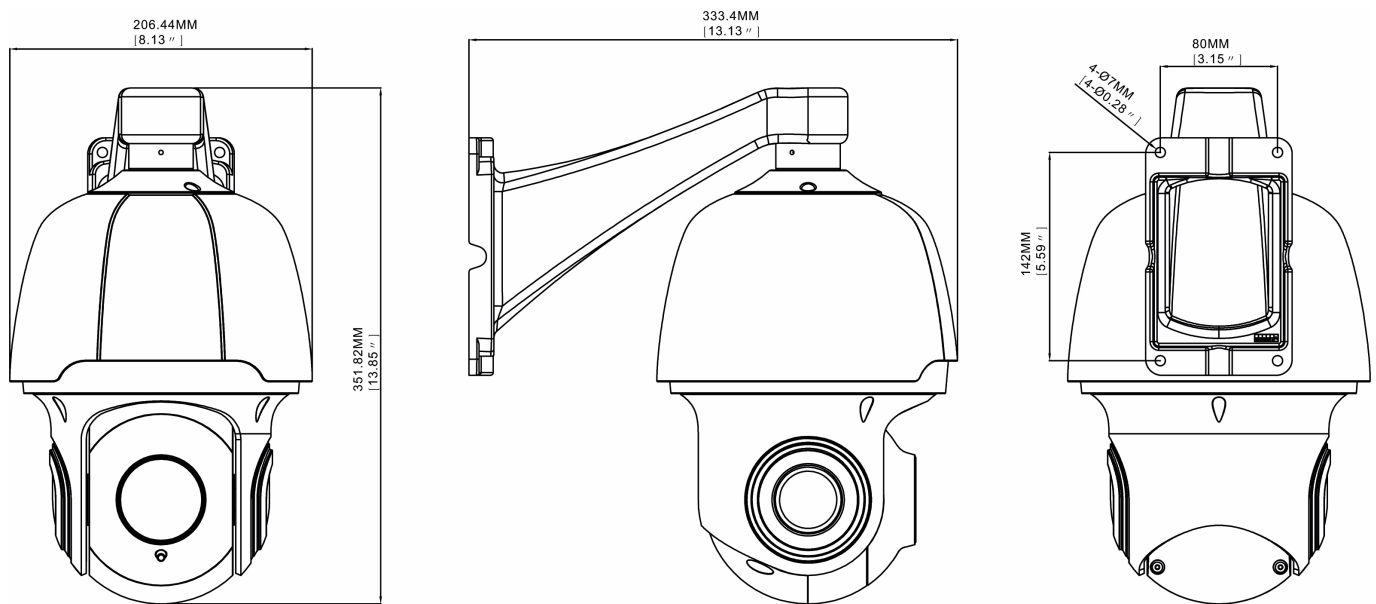

Maße / Dimensions: mm



eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8

63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

Stay informed and subscribe
to the eneo newsletter

