


eneo ISM-32F0036M00

SKU: 234978

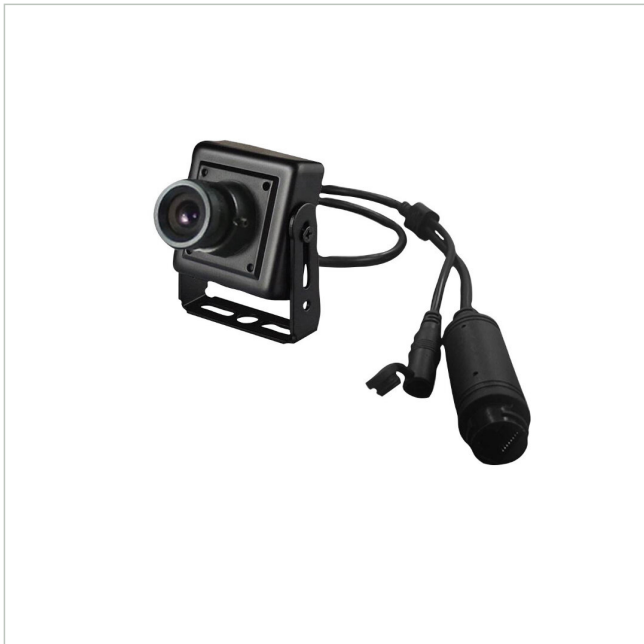

1/2,8" Mini Network Modul, 1920x1080, Day&Night, 3DNR, 3,6mm, 12VDC, PoE, Indoor

Main Features

Sony STARVIS 2MP Image Sensor

Resolution max. 1920x1080 (Full HD)

Video Compression Format: H.264/MJPEG

Motion Detection

Built in SD micro slot

Low Speed Shutter

2DNR, 3DNR and WDR support

PoE Cable

Lens 3.6mm (further lenses upon request)

Power Supply 12VDC (1.8W) or PoE (IEEE802.3af)

Operation Temperature -10°C - +50°C

Specifications

General	
Lighting	No
Dimensions (WxHxD) (extended)	35x35mm
Weight	0.2 kg
Text overlay	available
Color (Housing)	black
Housing type	Inside
Housing material	Metal
Camera Type	Board Camera
Power consumption	1.8 W
Mounting type	Ceiling, Wall

eneo ISM-32F0036M00

Continuation of the specifications

Power over Ethernet	IEEE 802.3af
Power supply	12VDC
Temperature Range (Operating)	-10°C ~ +50°C
Wide Dynamic Range (WDR)	WDR 100dB
Certifications	IK08
Camera	
Backlight compensation	Yes
Low Speed Shutter	Yes
Resolution standard	2 MP
Recording sensor	CMOS
Chip size	1/2,8"
Flickerless function	Yes
Camera shape	Module
Signal-to-noise ratio	50 dB
Day/night mode	Automatic,Day,Night
White balance	Indoor,Outdoor,User defined,Push
Photosensitivity	0,1 Lux bei F2,5,30 IRE
System	Electronic Day&Night
Day/night switching	Electronic
Display	
Image resolution max.	1920x1080
DORI	
Watch (62px/m)	22 m
Detect (125px/m)	9,9 m
Identify (250px/m)	3,6 m
Perceiving (25px/m)	56,6 m
Functions	
Audio support	No
Motion detector	Yes
Digital Noise Reduction (DNR)	Yes
Analysis	Motion Detection
Alarm processing	FTP
Browser	Edge: MJPEG, Mozilla: MJPEG, MS Internet Explorer from Vers. 9.0 or higher, Safari: MJPEG
Menu languages	English
Password	Administrator and User
Internal memory	microSD card slot
Notes	
Remark	To guarantee you an optimum user experience,we recommend that you only use components of the same brand in a system. If several brands are used in combination,eneo cannot guarantee functionality. If combined use is necessary,we offer a compatibility check

eneo ISM-32F0036M00

Continuation of the specifications

Interfaces / Inputs/ Outputs	
Alarm inputs	0
External connections	RJ-45,connection cable approx.15cm
Control Interfaces	Ethernet
Parts supplied	
Scope of delivery	manual,bag of screws,mounting bracket
Lens	
Horizontal angle of view	92°
Vertical angle of view	49°
Iris Control	No
Focal length	3,6 mm
Zoom Factor (Digital)	0
Video	
Image transfer rate max.	30 fps
Resolution (extended)	1920x1080 (16:9),1280x720 (16:9),800x600 (4:3),704x480 (4:3),640x480 (4:3),320x240 (4:3)
Data stream types	2x H.264,1x MJPEG simultan
Video Compression	H.264, M-JPEG
Product labeling:	
Manufacturer order number	234978



eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8

63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

Stay informed and subscribe
to the eneo newsletter

