

ISM-52F0021WMA

SKU: 235524



1/2,8" Network Module Camera, 1920x1080, Day&Night,, WDR, 2,1mm, H.265, PoE, 12VDC

Main Features

1/2,8" 2.0 MP CMOS-Sensor	WDR 120dB, Smart BLC
Resolution max. 1920x1080 (Full HD)	Slot for Micro SD memory card
Board Camera 50x50x50mm	ONVIF conformance, PoE IEEE802.af, Cross Web-Browsing
Quad Streaming (H.265, H.264, MJPEG)	Audio-, Alarm- In- and Outputs
True Day & Night (TDN)	Privacy zones, password protection, Cross Web-Browsing
Noise Reduction (2D-/3D-DNR)	NDAA compliant

Specifications

General:	
Dimensions (HxWxD)	50x50x50mm
Illumination	no
SDK	upon request
Text display	supplied
Camera Type	Board Camera
Housing	without housing
Blower	no
Mounting	Einbaumodul
Supply voltage	12VDC, PoE
Power consumption	4.3W

ISM-52F0021WMA

Continuation of the specifications

Power over Ethernet	IEEE 802.3af
Vandal proof	no
Operating temperature	0°C ~ +40°C
ONVIF	ONVIF Profile S, ONVIF Profile T
Weight	125g
DORI:	
Observe (62 px/m)	14 m
Recognize (125 px/m)	6,5 m
Identify (250 px/m)	2,9 m
Detect (25px/m)	36,5 m
Functions:	
Alarm processing	recording internal storage (SD card),E-Mail,FTP,HTTP,HTTPS,alarm out
User interface	Type B (white / blue)
Motion detector	yes
e-PTZ support	yes
Menu languages	English,German,French,Russian,Chinese,Korean,Japanese
Mirror function	flip,mirror
Multicast compliant	yes
Password protection	administrator & users
Privacy zone masking	Areas-ON/OFF switchable
Web browser	MS internet Explorer: ActiveX ex 9.0,Safari: MJPEG setup limited,Mozilla: MJPEG setup limited,Google: MJPEG setup limited,Edge: MJPEG setup limited
Digital Noise Reduction	yes
Audio support	yes
Internal storage	microSDXC card
Analysis functions	Motion detection, Perimeter Intrusion Detection (PID), Tampering Detection (TD)
Audio	2 Way Audio
Remote configuration	Browser
Notes:	
Remarks	NDAA compliance under Section 889,To guarantee you an optimum user experience, we recommend that you only use components of the same brand in a system. If several brands are used in combination, eneo cannot guarantee functionality. If combined use is necessary, we offer a compatibility check for a fee (for more information, see article number #229235 at VIDEOR).
Camera:	
Imager	SmartSens,SC200AI,CMOS
Automatic electronic shutter (ESC)	1~1/100.000Sek.

ISM-52F0021WMA

Continuation of the specifications

Flickerless function	yes
Backlight compensation	BLC
Low speed shutter	yes
Manual electronic shutter (MES)	1~1/100.000Sek.
Signal-to-noise ratio	50dB
Day&Night mode	Automatic,Day,Night
White balance	Automatic
Wide Dynamic Range (WDR)	TWDR 120dB,True WDR
Resolution Standard	HD 1080p
System	True Day&Night
Sensor size	1/2.8"
Day&Night switch	ICR
Camera type	Platine
Parts supplied:	
Parts supplied	manual,Connection cable set
Network:	
Network protocols	IPv4,IGMP,ICMP,TCP,UDP,DHCP,RTP,RTSP,RTCP,DNS,DVRNS,NTP,FTP,HTTP,HTTPS,SMTP,SSL,Zeroconf
Lens:	
Lens Type	fixed focal length
Focal Length	2,1 mm
Iris Control	no
Digital Zoom	yes
MOD (Mininum Object Distance)	0,3 m
Interfaces / Inputs/ Outputs:	
External connectors	Alarm output,Alarm input,Audio input/output,RJ-45,12VDC input (DC plug)
Video outputs	no
Alarm inputs	1
Alarm outputs	1
Ethernet interface	100Base-TX, 10Base-T
Serial interfaces	Ethernet
Video:	
Resolution	1920x1080 (16:9),1280x720 (16:9),704x480 (4:3),640x480 (4:3),352x288 (4:3)
Image display	VerticalView 90°/270°
Stream types	Quad Streaming
Video compression	H.264, H.265, MJPEG
Image resolution max.	1920x1080
Image Transmission Rate	30 fps
Other	
Horizontal Angle of View	140°

ISM-52F0021WMA

Continuation of the specifications


Vertical Angle of View	78°
------------------------	-----

Optional Accessory

SKU	Name	Description
218218	eneo Site Manager	Management Software for eneo IP products

Technical Drawing

Maße: Dimensions: mm

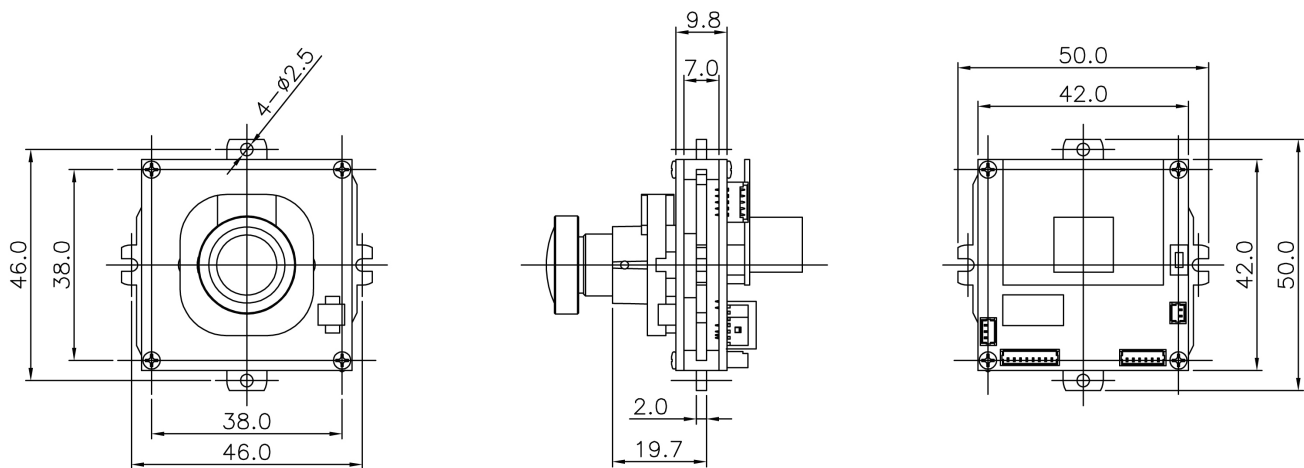

eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

Stay informed and subscribe
to the eneo newsletter

