

INP-72A0018MIA

SKU: 236322



Netzwerk Dome, PTZ, 18x 1920x1080, Day/Night, WDR, AI Alarm, Audio, 12VDC, PoE+, IP6

Main Features

1/2.7" SmartSens CMOS sensor	Browser independent (Edge, Safari, Firefox, Chrome)
Maximum resolution 1920x1080 pixels, 30fps	Supports ONVIF profiles S/T/G
AI analysis functions including object classification	Local storage via Micro SD card
WDR 120dB, 3D-DNR noise reduction	Audio & alarm input and output
Motorised autofocus zoom lens 18x 5.0-90mm	Power supply 12VDC or PoE IEEE 802.3at
Smart Codec H.265/H.264, multi-streaming	IR LED illumination, IP66

Specifications

General:	
Illumination	Infrared
Integrated wall mount	no
SDK	upon request
Text display	ON/OFF switchable
EAN/GTIN	4260229840535
DORI:	
Observe (62 px/m)	29,4 - 518,8 m
Recognize (125 px/m)	14,4 - 258 m
Identify (250 px/m)	7,2 - 127 m
Detect (25px/m)	73,9 - 1260 m

INP-72A0018MIA

Continuation of the specifications

Functions:	
Alarm processing	recording internal storage (SD card),E-Mail,HTTP,FTP,TCP,UDP,alarm out,Cloud Upload
Motion detector	yes
Menu languages	English,German,French,Italian,Portugese,Spanish,Turkish,Russian,Japanese
Mirror function	flip,mirror
Multicast compliant	yes
Password protection	administrator & users
Presets	250 presets
Privacy zone masking	Areas-ON/OFF switchable
Tours	up to 1 user programmable guard tour
Web browser	MS Internet Explorer 10/11,Safari ,Firefox ,Google Chrome ,Edge
Camera:	
Imager	SmartSens,SC200AI,CMOS
Automatic electronic shutter (ESC)	1/5 ~ 1/20.000sec.
Flickerless function	yes
Backlight compensation	BLC,HLC
Low speed shutter	yes
Manual electronic shutter (MES)	1/5 ~ 1/20.000sec.
Signal-to-noise ratio	39dB
Day&Night mode	Automatic,Day,Night,Image,Time
White balance	Automatic,Manual
Wide Dynamic Range (WDR)	WDR 120dB
Parts supplied:	
Parts supplied	manual,wall bracket,bag of screws
Network:	
Network protocols	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP,RTSP,SMTP,NTP,UPnP,SNMP,HTTPS,FTP
Interfaces / Inputs/ Outputs:	
External connectors	RJ-45,Audio input/output,Alarm in/output,12VDC input (DC plug),connection cable approx.45cm,micro SD card slot 256 GB
Video:	
Resolution	1920x1080 (16:9),1280x960 (4:3),1280x720 (16:9),640x480 (4:3),352:240 (4:3)
Image display	16:9,4:3
Stream types	Triple-Stream(Main/Sub/Mobile)
Other	
Remarks	NDA compliance under Section 889,The face detection and license plate recognition functions are only available with an inserted SD card or in conjunction with a recorder from the eneo IN series.,To guarantee you an optimum user experience, we recommend that you only use components of the same brand in a system. If several brands are used in combination, eneo cannot guarantee functionality. If combined use is necessary, we offer a compatibility check for a fee (for more information, see article number #229235 at

INP-72A0018MIA

Continuation of the specifications


Manufacturer order number	236322
---------------------------	--------

Optional Accessory

SKU	Name	Description
235562	CM-22	Corner mounting adapter for wall bracket WB-24 and PTZ dome camera INP-75A0033MIA
236198	eneo INsight Installation Tool	Supports adjustments for cameras with AI features for IN-series
218218	eneo Site Manager	Management Software for eneo IP products
235257	PM-21	Pole mounting adapter for camera connection box AK-20 and AK-21

Technical Drawing

Maße: Dimensions: mm

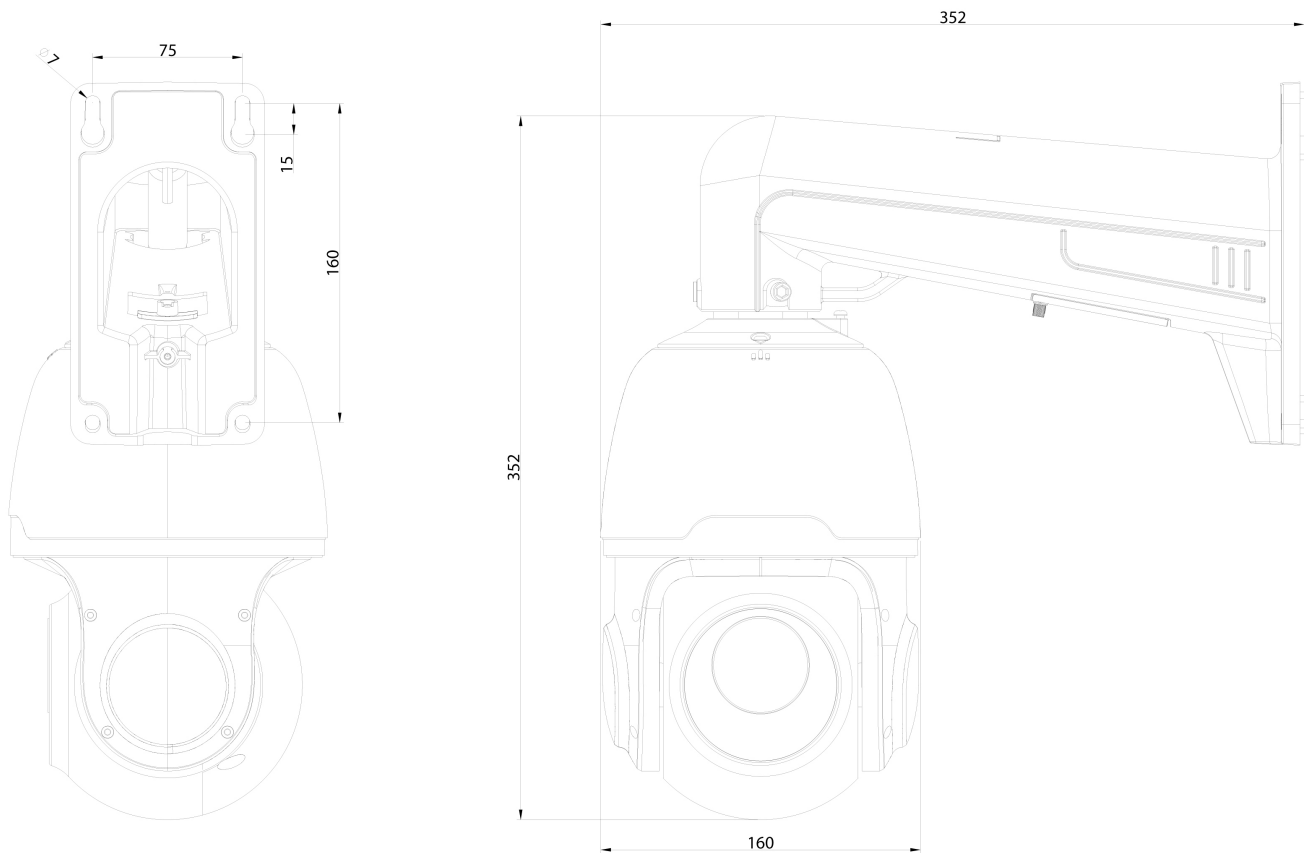

eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

Stay informed and subscribe
to the eneo newsletter

