NSUI-3004M0A

SKU: 242369

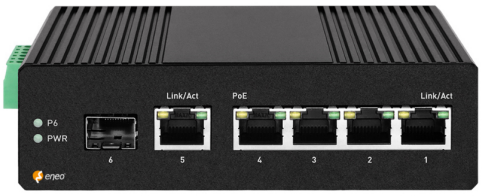

Gigabit Switch Industrial, Unmanaged, 4x PoE, 1xRJ45, 1xSFP, 30W each Port, -40°C~75°C, 44~57 VDC

Main Features

- 5 RJ45 ports with 10/100/1000 Mbps
- 1 Gigabit SFP port for fiber optic uplink
- 4 PoE+ ports, each with up to 30W power
- Total PoE power: up to 60 watts
- Supports IEEE 802.3af/at standards
- Silent operation thanks to fanless design
- High EMC protection level
- Plug-and-play, no configuration, easy to use
- Redundant power supply 44-57VDC
- Robust IP30 housing, DIN-RAIL or wall mounting
- Operating temperature range: -40-75°C
- Power supply not included

Specifications

Other	
Dimensions (HxWxD)	38,5x136x108mm
Construction	DIN rail module
Remarks	Power supply unit is not included in the scope of delivery,To achieve the specified PoE budget (total) value, please use suitable power supplies or PoE injector.PoE budget: 90W max. for a single PoE port; 75W max. for all PoE ports when supplied via PD port; 120 W max. for all PoE ports when supplied via DC input
Trunk	IEC61000-4-2,IEC61000-4-5
Internal switching capacity (Gbit/s)	12 Gbps

© Copyright eneo by VIDEOR E. Hartig GmbH, June 2025 -Technical changes reserved

NSUI-3004M0A

Continuation of the specifications

Internal switching capacity (Mpps)	8,9 Mpps
Parts supplied	manual,1x DIN Rail
Multicast compliant	no
Ethernet standards	IEEE 802.3 10BaseT,IEEE 802.3u 100BaseTX,IEEE 802.3x Flow Control,IEEE 802.3af Power Over Ethernet (PoE),IEEE 802.3at Power Over Ethernet (PoE+)
Optical connector	SFP Port
Port mirror	no
QoS	no
SNMP	no
Type	Unmanaged
Series	eneo Switch
Mounting	DIN rail, wall mount
Blower	no
Ethernet interface	1000Base-T, 100Base-TX, 10Base-T
VLAN	no
Ports	1x 1000Mbps SFP, 5x 10/100/1000Mbps
PoE ports (number)	4
Management	no
Supply voltage	44~57 VDC
Power consumption	65W
Power over Ethernet	IEEE 802.3af, IEEE 802.3at
PoE budget	60 W
Operating temperature	-40°C ~ +75°C, @ Humidity 10%-90% (non-condensing)
Weight	939g
Manufacturer order number	242369

Optional Accessory

SKU	Name	Description
242377	NSFP-20000DLC	SFP Module, 1.25 Gbps, 20KM, Duplex LC, Tx/Rx at 1310 nm, hot-plug, SFP MSA-compliant, Digital Monitoring
242376	NSFP-20000SLC	SFP Modul Pair, 1.25 Gbps, 20 km, Duplex LC, Tx/Rx at 1310/1550nm, SFP MSA-compliant, Digital Monitoring
242375	NSFP-20000SSC	SFP Modul Pair, 1,25Gbps, 20KM, Simplex SC, Tx/Rx at 1310/1550nm, SFP MSA-compliant, Digital Monitoring
242374	NSFP-3000SLC	SFP Modul Pair, 1,25Gbps, 3KM, Duplex LC, Tx/Rx at 1310/1550nm, SFP MSA-compliant, Digital Monitoring

© Copyright eneo by VIDEOR E. Hartig GmbH, June 2025 -Technical changes reserved

NSUI-3004M0A

Continuation of accessory

242373	NSFP-3000SSC	SFP Modul Pair, 1,25Gbps, 3KM, Simplex SC, Tx/Rx at 1310/1550nm, SFP MSA-compliant, Digital Monitoring
216479	SFP-0850M10	SFP Modul, 1.25Gbps, 550m, Multimode, 850nm, Duplex LC Connector, 0°~+70°C
218759	SFP-0850M10-10G	SFP Modul, 10Gbps, 300m, Multimode, 850nm, Duplex LC Connector, -5°~+70°C
218758	SFP-0850M40	SFP Modul, 1,25Gbps, 550m, Multimode, 850nm, Duplex LC Connector, -40° ~ +70°C
216567	SFP-0850MM10	SFP Modul, 155Mbps , 2km, Multimode, 850nm, Duplex LC Connector, 0°~+70°C
216478	SFP-1310M40	SFP Modul, 1.25Gbps, 550m, Multimode, 1310nm, Duplex LC Connector, -40°~+75°C
216566	SFP-1310S10	SFP Modul, 1.25Gbps, 20km, Singlemode, 1310nm, Duplex LC Connector, 0°~+70°C
218760	SFP-1310S10-10G	SFP Modul, 10Gbps, 10km, Singlemode, 1310nm, Duplex LC Connector, -5°~+70°C
216477	SFP-1310S40	SFP Modul, 1.25Gbps, 20km, Singlemode, 1310nm, Duplex LC Connector -40°~+75°C

© Copyright eneo by VIDEOR E. Hartig GmbH, June 2025 -Technical changes reserved