


eneo NSFP-3000SSC

SKU: 242373

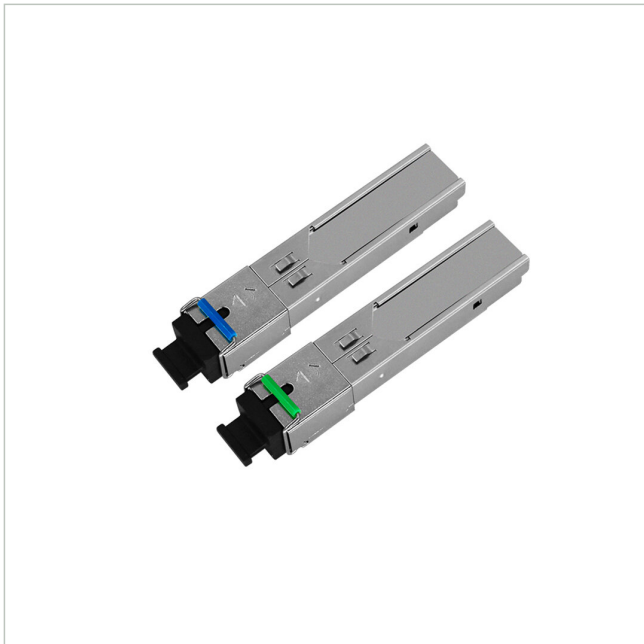

SFP Modul Pair, 1,25Gbps, 3KM, Simplex SC, Tx/Rx at 1310/1550nm, SFP MSA-compliant, Digital Monitoring

Main Features

1250 Mbps data rate via single-mode fiber
BIDI design for single-fiber use (1310/1550 nm)
Up to 3 km range on 9/125 µm SMF
SC optical connector
Compliant with SFP MSA & SFF-8472
Digital Diagnostics (DDM/DOM) integrated

Single +3.3V power supply required
Metal housing reduces EMI interference
Wide temp. range: -40°C to +85°C (industrial)
TX fault and LOS detection supported
Low power consumption (max. 300 mA)
RoHS compliant and lead-free assembly

Specifications

General	
Number of fibers	1
Design	Module
Dimensions (WxHxD) (extended)	13,8x13,75x65,2mm
Application environment	inside
Weight	43 kg
Transmission medium	Glass fibre
Type	SFP Module
Reach	3 km
Temperature Range (Operating)	-40°C ~ +85°C
Wavelength	1310nm, 1550nm

eneo NSFP-3000SSC

Continuation of the specifications

Recording	
Mode	Single Mode
Product labeling:	
EAN/GTIN	4260229841655
Manufacturer order number	242373



eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8

63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

Stay informed and subscribe
to the eneo newsletter

