


# eneo NSFP-20000SSC

SKU: 242375

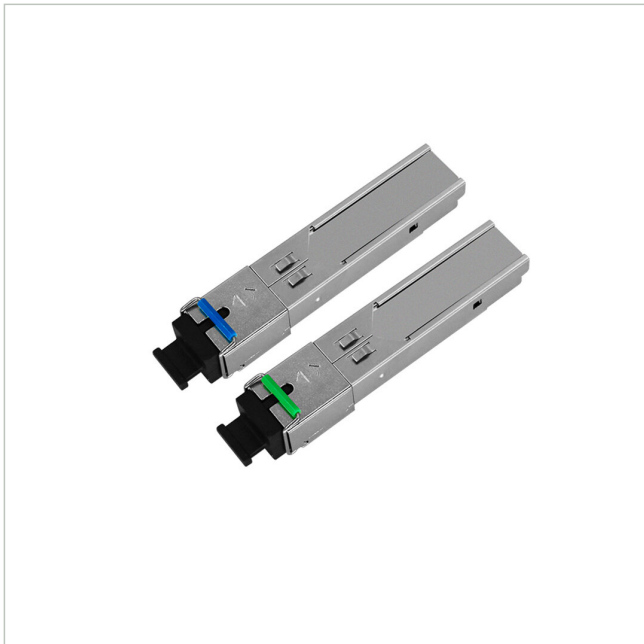

SFP Modul Pair, 1,25Gbps, 20KM, Simplex SC, Tx/Rx at 1310/1550nm, SFP MSA-compliant, Digital Monitoring

## Main Features

1250 Mbps data rate via single-mode fiber  
BIDI design for single-fiber use (1310/1550 nm)  
Up to 20 km range on 9/125 µm SMF  
SC optical connector  
Compliant with SFP MSA & SFF-8472  
Digital Diagnostics (DDM/DOM) integrated

Single +3.3V power supply required  
Metal housing reduces EMI interference  
Wide temp. range: -40°C to +85°C (industrial)  
TX fault and LOS detection supported  
Low power consumption (max. 300 mA)  
RoHS compliant and lead-free assembly

## Specifications

General	
Number of fibers	2
Design	Module
Dimensions (WxHxD) (extended)	13,8x13,75x65,2mm
Application environment	inside
Weight	43 kg
Transmission medium	Glass fibre
Type	SFP Module
Reach	20 km
Temperature Range (Operating)	-40°C ~ +85°C
Wavelength	1310nm

# eneo NSFP-20000SSC

Continuation of the specifications

Recording	
Mode	Single Mode
Product labeling:	
Manufacturer order number	242375



eneo is a registered trademark of  
VIDEOR E. Hartig GmbH  
Carl-Zeiss-Straße 8

63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300  
Fax: +49 6074 - 888 - 100  
E-Mail: [info@eneo-security.com](mailto:info@eneo-security.com)  
Web: [www.eneo-security.com](http://www.eneo-security.com)

Stay informed and subscribe  
to the eneo newsletter

